

The Smart Solution for Hard Water



Contact: **8980402374**

Email: sales@sanimaxindia.com
www.sanimaxindia.com

POWER ON

PROCESSOR ON

PROCESSOR ON

NO SALT, NO CHEMICALS, NO MAGNETISM
MICRO PROCESSOR BASED WATER CONDITIONER / DESCALER

Model No.:

Sr. No.:

**RESIDENTIAL MODEL
SPECIFICATION
SHEET**

FROM



How Sanimax Scale Terminator works




Signal cable delivering frequencies from the computerized control box.

Sanimax Scale Terminator's signal produces a wave current that sweeps all the frequency responses from 1,000-20,000 Hz at a rate of 20 times a second.

Sanimax Scale Terminator's signal causes the ions to precipitate or collide with each other to the point where the calcium crystals grow until they become so large that there are no more surface charges left to stick to the pipe walls or any other surface.

This inaudible signal at sonic frequencies causes turbulence in the water molecules and ion exchange in mineral atoms.

Crystals are unable to adhere to any surface and do not precipitate out as hard scale.

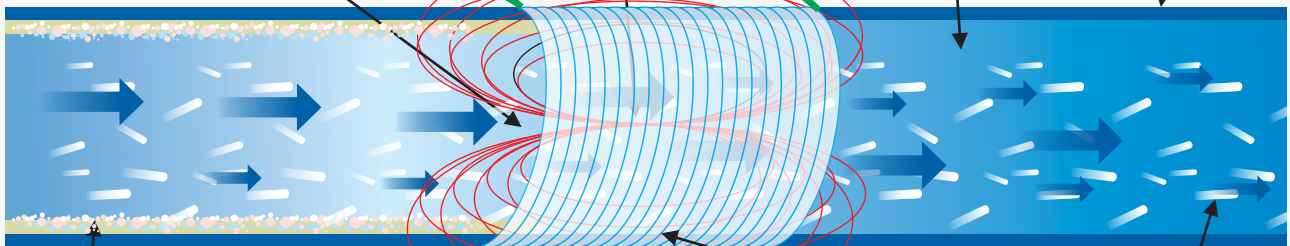

Incoming water containing calcium carbonate, the mineral mainly responsible for lime scale deposits.

Unique and complex modulating frequency waveform hits the resonant frequency of the calcium carbonate molecules causing them to lose their adhesive properties.

Sanimax Scale Terminator induction coil wrapped externally around pipe on incoming water supply line.

Empty water molecules attract calcium molecules from scale buildup on pipes and other surfaces that have scale buildup. This causes any existing scale to go away and never return again.

Sanimax Scale Terminator

PIPE SIZE CAPACITY :

Upto any pipe size diameter. Designed for residential and Indoor and outdoor use both.

PIPE TYPE :

Effective for all type of pipe.

INPUT VOLTAGE/CURRENT :

5 AMP/220Vsupplied through a wall mount power supply

INPUT POWER :

5 Watts

OPERATING TEMPERATURE :

32° F to 130° F

STORAGE TEMPERATURE :

10° F to 150° F

OUTPUT VOLTAGE :

5 AMP/220V

DESCALING METHOD :

The control box supplies a square wave signal to a coil of wire that is wrapped externally around the incoming pipeline entering the home. The signal sweeps all the frequencies from 1,000 to 20,000 Hz at a rate of 20 times a second. This produces a modulating frequency waveform that hits the resonant frequency of the calcium molecules causing them to lose its adhesiveness.

ENCLOSURE DIMENSIONS :

14" X 12" X 7"

ENCLOSURE MATERIAL :

made out of high-impact ABS molded plastic, Weatherproof enclosure.

SIGNAL CABLE :

A special stranded wire, 18 - 50 feet long (according to the unit sizes)[not available in hardware stores], is included with the unit.

WARRANTY :

30 Days Refund & Replacement Warranty, 1 Year Replacement Warranty, 10 Years Performance Warranty.

CARTON DIMENSIONS :

16" x 14" x 9"

Customer Care Support.

In case of any discrepancies or complaints, customer can reach to us on
Email I'd : info@ecosukrutam.com / Our helpline number : 8980402374

